PowerBase®

Standard Charger

C-201A

USER MANUAL

Congratulations on your purchase of this outstanding PowerBase standard charger and batteries. This manual describes how to operate this charger and batteries.

Instructions for Use

1) Place 2/4 AA or AAA batteries into the battery compartment. Batteries must be inserted properly for good electrical contact and correct polarity direction.
2) Plug the charger into the wall AC outlet. The red LED indicator light will glow to indicate a normal charging mode.
3) For each charging period of 14-16 hours is completed, disconnected the charger from the mains and remove the batteries.
4) Do not overcharge the batteries beyond the recommended charging time (16 hours), otherwise it will shorten the lifespan of the batteries.

*C-201A Charger is designed to charge 2 or 4 AA / AAA sizes Ni-MH Ni-Cd batteries. Please refer to the combinations below;

(1) For AA , AAA , 9V Cells.

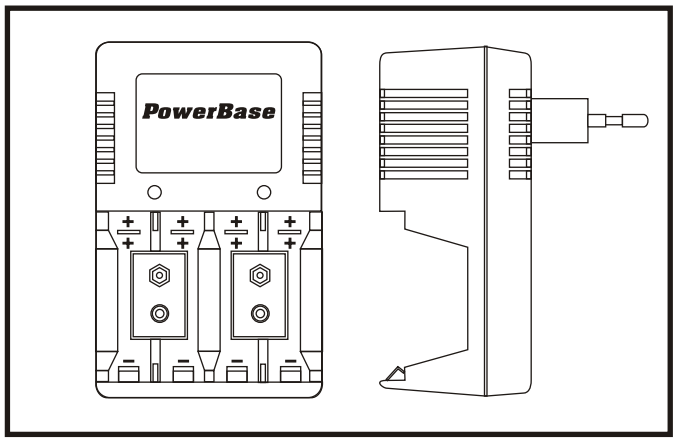

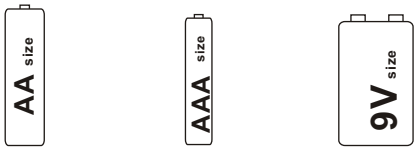

Charging Method : 1) For AA / AAA --- 2 or 4 pieces
2) 9V --- 1 or 2 pieces

NOTE : Never put Ni-MH and Ni-Cd batteries together in the PowerBase Rapid Charger

CAUTION

1) Before using this charger, read all instructions and cautionary markings in this manual.
2) This charger is for indoor use only. Do not expose the charger to rain, snow or moisture.
3) Do not use an extension cord.
4) Do not use the charger if it has received a sharp blow, been dropped or damaged in any way.
5) Always disconnect the charger from wall outlet if attempting to clean or inspect he charger or batteries.
6) Do not try to disassemble the charger, take it to a qualified serviceman when service or repair is required. Incorrect reassembly may result in a risk of electric shock or fire.
7) Do not charge leaking, corroded or dead batteries.
8) Store the charger and batteries in a cool dry place when not in use. This charger is not intended for young children or infant.
9) Do not disassemble the batteries, short circuit or dispose of in fire.

PLEASE NOTE:

*PowerBase Industrial (HK) Ltd. will not be responsible for any personnel loss and/or injury if the defect was caused by misuse or mishandling by the user in any way.
Recommended charging temperature is between 15 - 40 degree C.

PowerBase®

Standard Charger

C-201A

USER MANUAL

Congratulations on your purchase of this outstanding PowerBase standard charger and batteries. This manual describes how to operate this charger and batteries.

Instructions for Use

1) Place 2/4 AA or AAA batteries into the battery compartment. Batteries must be inserted properly for good electrical contact and correct polarity direction.
2) Plug the charger into the wall AC outlet. The red LED indicator light will glow to indicate a normal charging mode.
3) For each charging period of 14-16 hours is completed, disconnected the charger from the mains and remove the batteries.
4) Do not overcharge the batteries beyond the recommended charging time (16 hours), otherwise it will shorten the lifespan of the batteries.

*C-201A Charger is designed to charge 2 or 4 AA / AAA sizes Ni-MH Ni-Cd batteries. Please refer to the combinations below;

(1) For AA , AAA , 9V Cells.

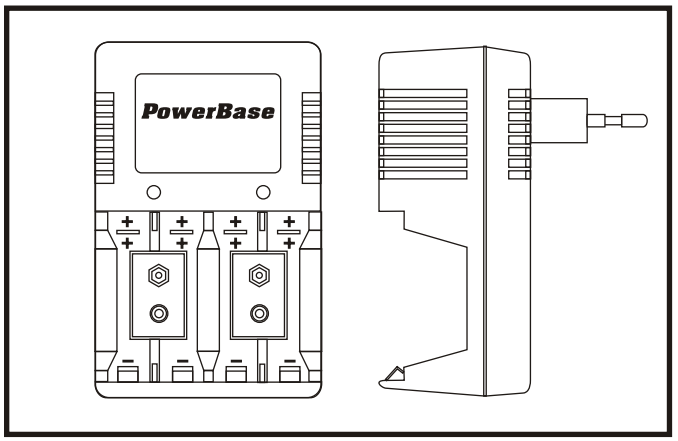

Charging Method : 1) For AA / AAA --- 2 or 4 pieces
2) 9V --- 1 or 2 pieces

NOTE : Never put Ni-MH and Ni-Cd batteries together in the PowerBase Rapid Charger

CAUTION

1) Before using this charger, read all instructions and cautionary markings in this manual.
2) This charger is for indoor use only. Do not expose the charger to rain, snow or moisture.
3) Do not use an extension cord.
4) Do not use the charger if it has received a sharp blow, been dropped or damaged in any way.
5) Always disconnect the charger from wall outlet if attempting to clean or inspect he charger or batteries.
6) Do not try to disassemble the charger, take it to a qualified serviceman when service or repair is required. Incorrect reassembly may result in a risk of electric shock or fire.
7) Do not charge leaking, corroded or dead batteries.
8) Store the charger and batteries in a cool dry place when not in use. This charger is not intended for young children or infant.
9) Do not disassemble the batteries, short circuit or dispose of in fire.

PLEASE NOTE:

*PowerBase Industrial (HK) Ltd. will not be responsible for any personnel loss and/or injury if the defect was caused by misuse or mishandling by the user in any way.
Recommended charging temperature is between 15 - 40 degree C.